

8 P35 GAS BOTTLES SLINGABLE CAGE

Technical qualities:

The Slingable Cage was developed in collaboration with waterproofing specialists, to improve the storage and handling of gas bottles, both in the workshop and on site.


Its mechano-welded steel structure, extremely robust, is equipped with a flat support surface with no salient angles, so as not to damage the floor, including the waterproofing membranes on the roof terrace.

Its hot galvanization treatment guarantees you a very good durability, even when used outdoors.

The bottles are loaded and unloaded on one side, after opening the door to a flap. A central locking device, in the centre of the cage that opens in the same direction as the door, keeps the bottles in position inside the cage, allowing for partial loading.

To facilitate the loading of the bottles, the drop-off area has been lowered to the maximum, in order to limit the carrying of load.

The cage has a sling point and can also be moved with a forklift. In this case, the forks of the forklift are positioned at the top of the cage, avoiding any accidental tipping.

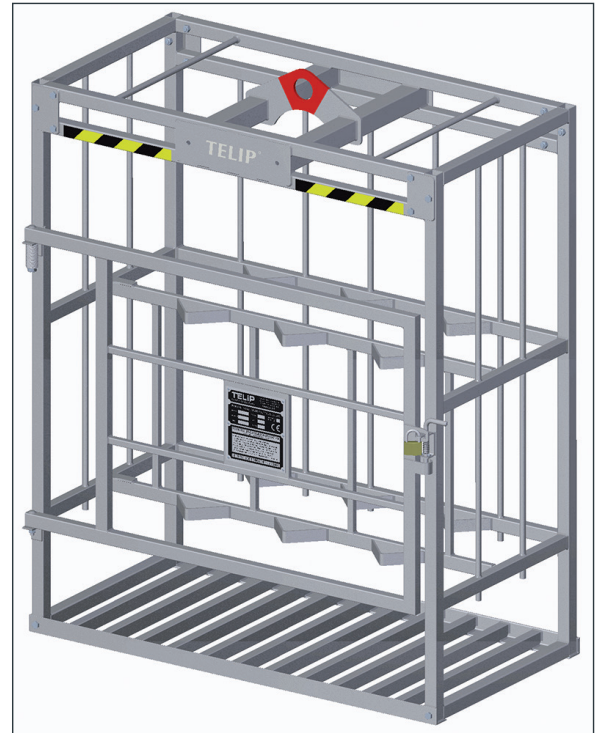

Ref. 300 851

The 8 Gas Bottles Slingable Cage is the ideal solution to store and move your bottles safely in the workshop and on site.

- Suitable for P13 and P35 gas bottles
- Capacity: up to 8 gas bottles
- Sustainable construction of hot galvanized steel
- Transportable to forklift and slingable
- Devices to hold bottles directly integrated into the structure and allowing the cage to be slung even in the case of a partial load
- Door equipped with a robust closure system and a safety padlock

Applications:

- Secures handling operations
- Makes it easier to store bottles
- Fight against the theft of bottles on site...

Characteristics:

- Hot galvanized steel structure (according to ISO 1461)
- Clutter (L x W x H): 1380 x 775 x 1710 mm
- Ground support surface (L x W): 1380 x 710 mm
- Extra-flat loading height: 50 mm
- Maximum bottle diameter: 310 mm
- Empty cage weight: 135 kg
- Maximum usage load: 560 kg
8 P35 bottles weighing 70 kg each
- Total weight allowed in charge: 695 kg




Device developed in collaboration with the French Trade Union Chamber of Waterproofing

In compliance with the machine Directive 2006/42/CE

For further information about this product:

contact@telip.fr

Dimensional Drawings:

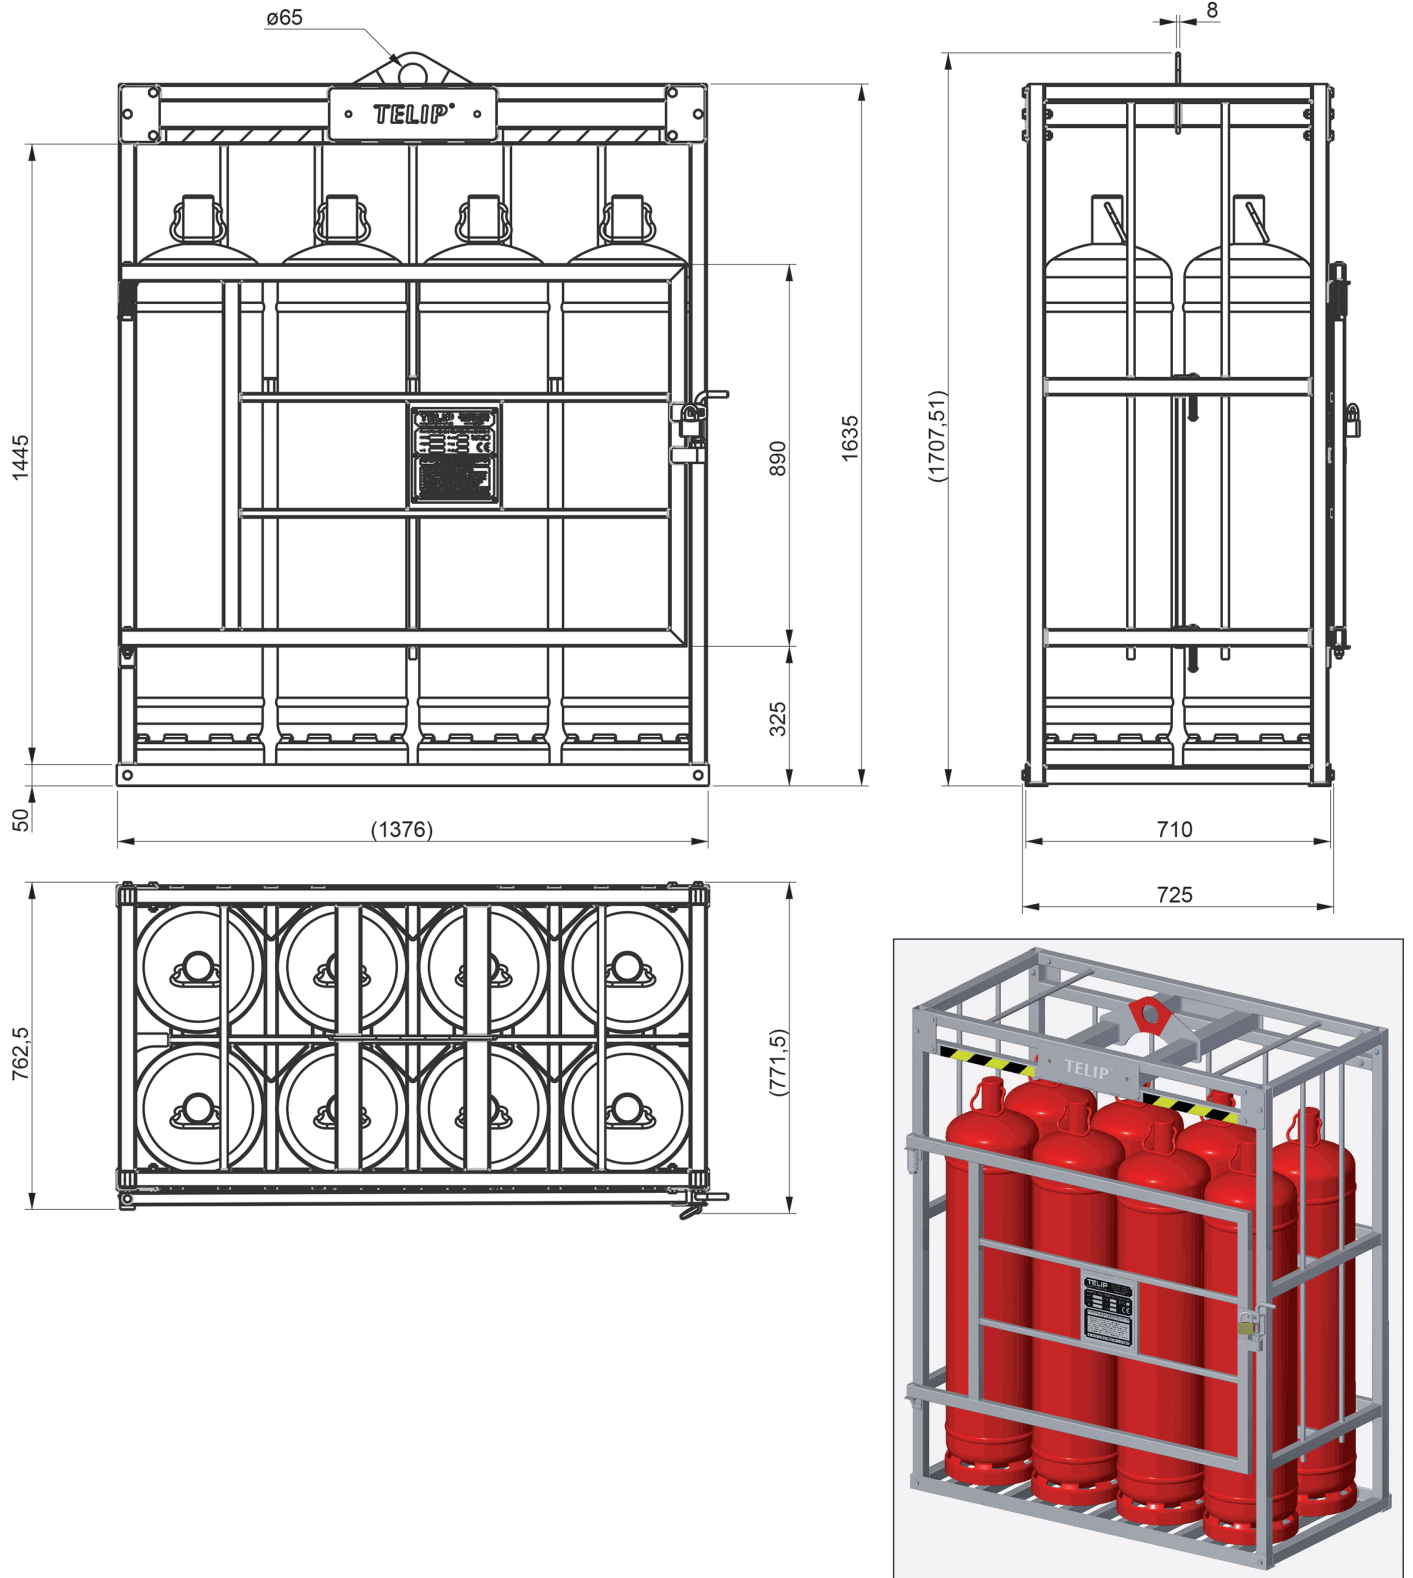

Bottles not supplied

Terms of use

The user is responsible for defining the products to be adapted to its own use. TELIP takes charge of submitting accurate and updated information. However, as part of the continuous improvement of its products, TELIP reserves the right to proceed with frequent modifications without warning. Therefore, TELIP cannot guarantee the accuracy and current reality of information on its products. All transactions are subject to general terms and conditions of sales and transportation. These conditions are available upon request and downloadable on the website www.telip.fr.

TELIP
MANUTENTION ET LEVAGE

TELIP
2, rue Andrée Reigner - Z. I. La Bougeoire
35 130 La Guerche de Bretagne
FRANCE

Tél. : 02 99 96 17 16
Fax : 02 99 96 17 26

contact@telip.fr
www.telip.fr