

## MINI STACKER MG 250 AV

### Technical qualities:

The MG 250 AV mini stacker is equipped with either inflatable or rigid wheels, depending on the use.

Its inflatable wheels allow the use of this stacker on site. In the workshop it is fitted with rigid wheels with rubber tires.

Thanks to its twin swivel casters at the front, it remains very manoeuvrable.

Its zinc-plated steel winch, its  $\varnothing 6$  mm galvanized steel cable and its reeled cable system generate less effort for lift a heavy load of 250 kg.

It has an optional removable platform to be even more versatile, and to handle loads with fragile bottoms.<sup>(3)</sup>



**Ref. 300211<sup>(1)</sup> / 300215<sup>(2)</sup>**

*The MG 250 AV Mini Stacker was initially designed for boilers but also for all bulky items.*

- Robust structure in EPOXY painted steel
- Cable muffled
- 2 types of wheels available
- Handy thanks to swivel casters

### Applications:

- Moving loads on site
- Additional workstation <sup>(3)</sup>

### Characteristics:

- Maximum working load: 250 kg
- Lifting height: 89 à 1208 mm
- Raised by crank turn: 23 mm
- Self-braking manual winch in zinc-plated steel
- Galvanized steel cable  $\varnothing 6$  mm
- Pneumatic or rigid wheels  $\varnothing 260$  mm
- Twin swivel casters  $\varnothing 50$  mm at the front
- Forks section (L x W x H): 520 x 40 x 20 mm
- Center distance between forks: 300 mm
- Clutter (L x W x H): 960 x 630 x 1580 mm
- Net weight: 68 kg

(1): Pneumatic wheel version

(2): Rigid wheels version with rubber tires

(3): With the platform accessory ref. 300 714

For further information about this product:

**contact@telip.fr**

## Accessories:




The removable platform on the MG 250 allows an important seat which allows the transport of bags, boxes or others.

This 600x600 steel platform is removable, so it is possible to put it or not, depending on use.

**Reference : 300 214**

## Dimensional Drawings:

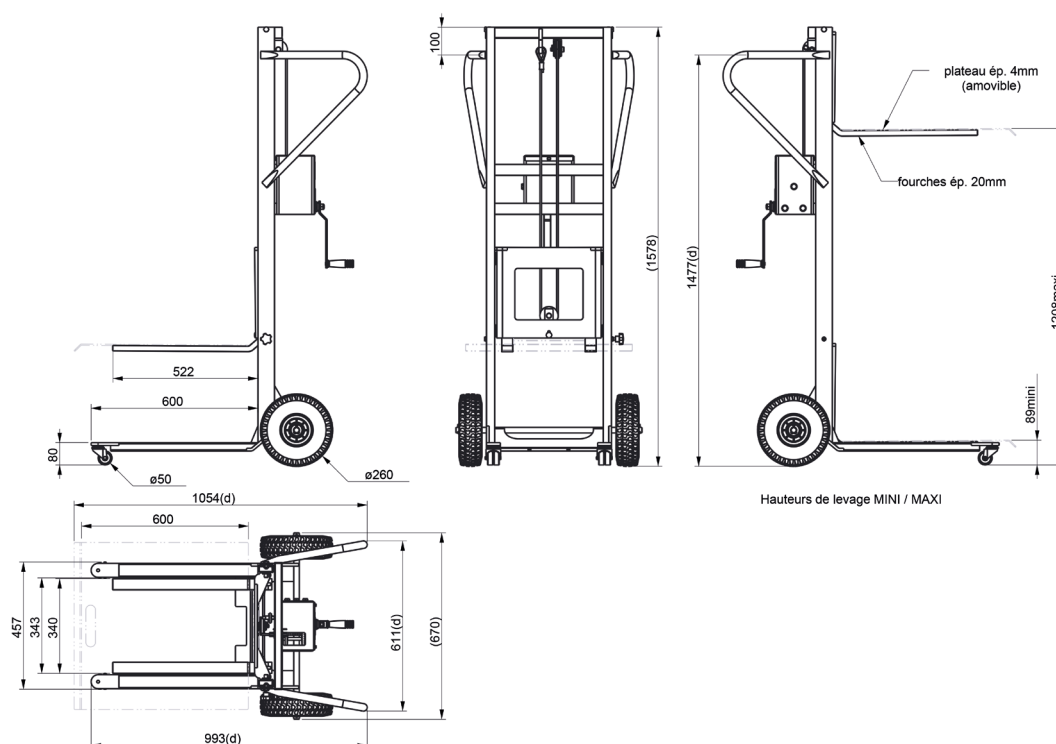

### Terms of use

The user is responsible for defining the products to be adapted to its own use. TELIP takes charge of submitting accurate and updated information. However, as part of the continuous improvement of its products, TELIP reserves the right to proceed with frequent modifications without warning. Therefore, TELIP cannot guarantee the accuracy and current reality of information on its products. All transactions are subject to general terms and conditions of sales and transportation. These conditions are available upon request and downloadable on the website [www.telip.fr](http://www.telip.fr).

**TELIP**  
MANUTENTION ET LEVAGE

TELIP  
2, rue Andrée Reigner - Z. I. La Bougeoire  
35 130 La Guerche de Bretagne  
FRANCE

Tél. : 02 99 96 17 16  
Fax : 02 99 96 17 26

[contact@telip.fr](mailto:contact@telip.fr)  
[www.telip.fr](http://www.telip.fr)