

STAINLESS STEEL ELECTRIC LIFT TABLE **100 KG**

Technical qualities:

The structure of this stainless steel electric lift table is made of 304 L stainless steel with an electro-polishing finish.

It can be fitted with a polyethylene or a stainless steel platform, of your choice.

The elevation is carried out via an electric cylinder.

Standard comes with two batteries and a separate charging base (charging batteries on the sector (230 V / 50-60 Hz).

The table is mounted on 4 braked swivel wheels \varnothing 125 mm with non-staining grey rubber bandage, so it is very handy.

For optimal hygiene, the entire table is cleaned under water.

The control box has two buttons: «up» and «down». Connected by a spiral cord, it can be attached to the handle.



Ref. 300 821⁽¹⁾ / 300 822⁽²⁾

*Compact and lightweight, the 100 kg **Stainless Steel Electric Lift Table** makes the day-to-day tasks of staff easy.*

Characteristics:

- Maximum working load: 100 kg
- Lifting height: 340 to 1000 mm
- 4 wheels with break \varnothing 125 mm
- Clutter (L x W x H): 1160 x 550 x 1060 mm
- Platform 550 x 900 mm
- IPX6 2-button control, on spiral cord
- IPX6 electric cylinder, with stainless steel rod (washable without HP)
- 24 Vcc battery power
- Autonomy: 40-up/descent rated load
- Empty weight: 55 kg

Terms of use:

- Temperature of use : +5°C à +40°C
- 10% service factor: 2 minutes maximum of use, followed by a minimum of 18 minutes of pause
- Load evenly distributed on the platform

(1) ref. 300821 : table with polyethylene platform (PEHD500)

(2) ref. 300822 : lift table with a stainless steel platform

- 304 L Stainless steel chassis with an electro-polishing finish

- Handy, thanks to its 4 swivel wheels

- 2 available platforms : stainless steel or PEHD

- Autonomous operation (on battery)

- Easy to use

- Cleanable under water

Applications:




- Handling in agro-food industries
- Handling on difficult environments
- Cold and wet environments

For further information about this product:

contact@telip.fr

In compliance with the machine Directive 2006/42/CE

Dimensional Drawings:

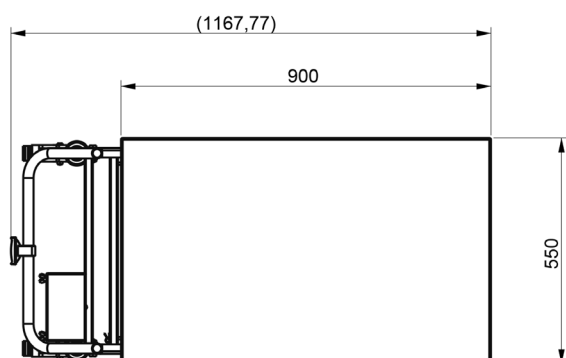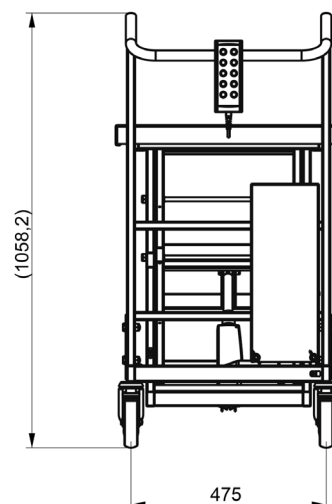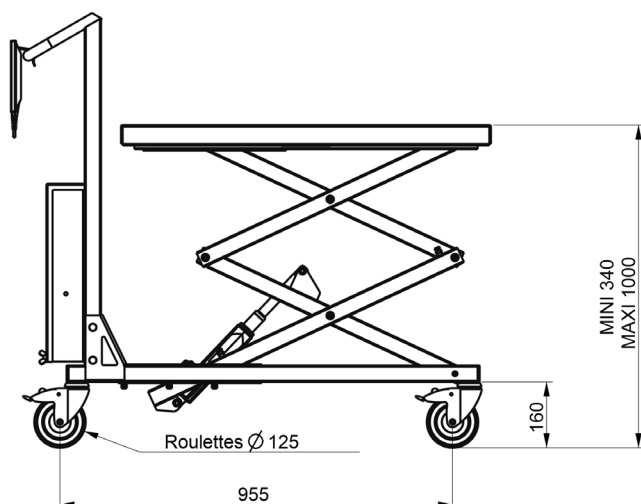

Terms of use

The user is responsible for defining the products to be adapted to its own use. TELIP takes charge of submitting accurate and updated information. However, as part of the continuous improvement of its products, TELIP reserves the right to proceed with frequent modifications without warning. Therefore, TELIP cannot guarantee the accuracy and current reality of information on its products. All transactions are subject to general terms and conditions of sales and transportation. These conditions are available upon request and downloadable on the website www.telip.fr.

TELIP
MANUTENTION ET LEVAGE

TELIP
2, rue Andrée Reigner - Z. I. La Bougeoire
35 130 La Guerche de Bretagne
FRANCE

Tél. : 02 99 96 17 16
Fax : 02 99 96 17 26

contact@telip.fr
www.telip.fr