

HYDRAULIC BEAM LIFTER

LPH 600

Technical qualities:

The Hydraulic Beam Lifter LPH 600 has a robust structure in epoxy painted steel. These two large handles allow for a comfortable grip and easy steering.

The four swivel wheels give great manoeuvrability on construction sites.

It's equipped with a rotating platform (360 degrees) as well as a removable 250 mm extension to reach a height of 3 m. The LPH 600 has a lifting ring to lift the load from the ground and can act as a lifting boom.

It is a very precise tool thanks to its hydraulic group, easy to use: lever-raised to have a precise lift. It can lift a 600 kg beam on his own.

To have more stability, we recommend the use of two beam lifters, so it is possible to lift a beam up to 1200 kg.

The beam lifter is fully removable without tools, thanks to its axes and pins which cannot be misplaced by small steel cables hanging on the chassis.

This is a space saver thanks to a foldable structure and stacking system that makes storage easier. Its small footprint is an advantage when transporting.



Ref. 300 871

The LPH 600 Hydraulic Beam Lifter can be used for beam lifting but also for lifting and handling all other loads.

- Robust
- Manoeuvrable
- Ergonomic
- Full removable to be transported
- Manually adjustable descent speed

Applications:

- Beam handling and lifting


Characteristics:

- Maximum working load: 600 kg
- When two beam lifters are used: 1200 kg
- Lifting height from 85 cm to 300 cm
- Platform dimension (L x W x H): 360 x 220 x 110 mm
- Clutter (L x W x H) : 1811 x 784 x 1190 à 2750 mm
- Clutter in folded state (L x W x H): 1707 x 784 x 633 mm
- Wheels size: 150 mm
- Tare weight: 130 kg


For further information about this product:

contact@telip.fr

Dimensional Drawings:

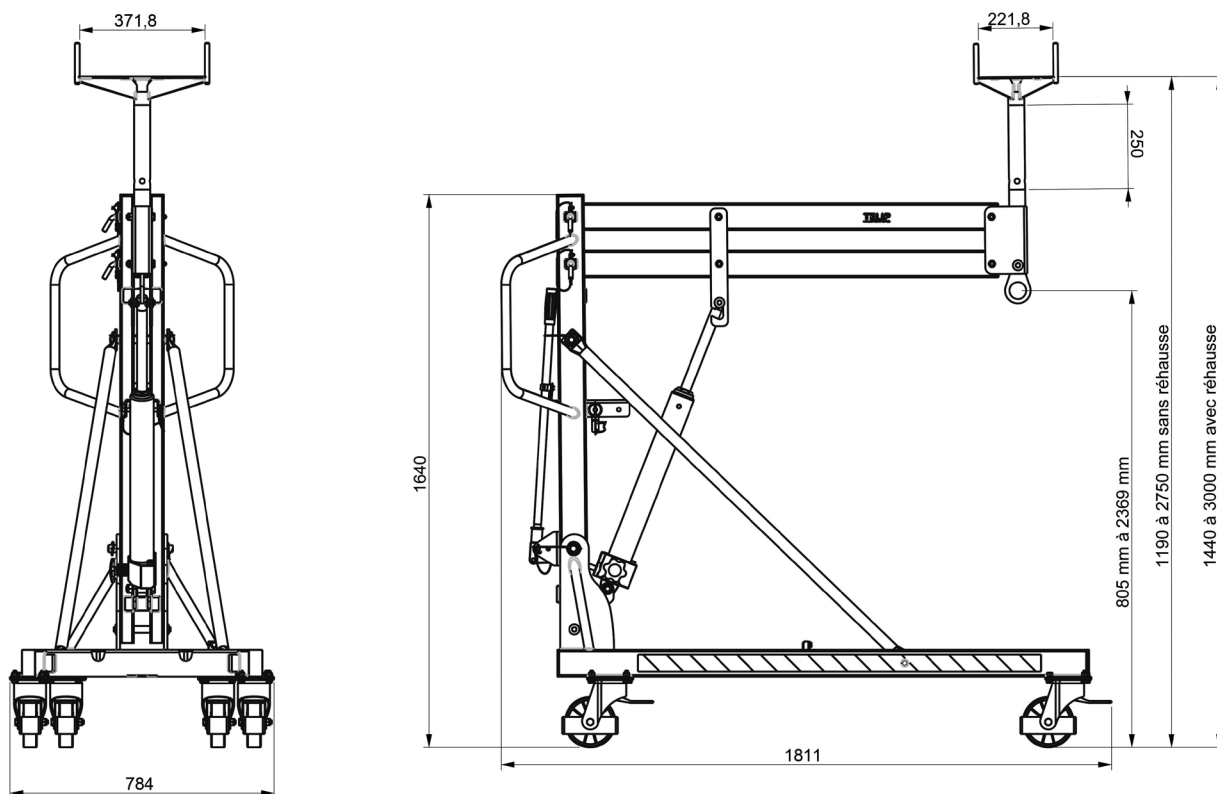

In folded state:

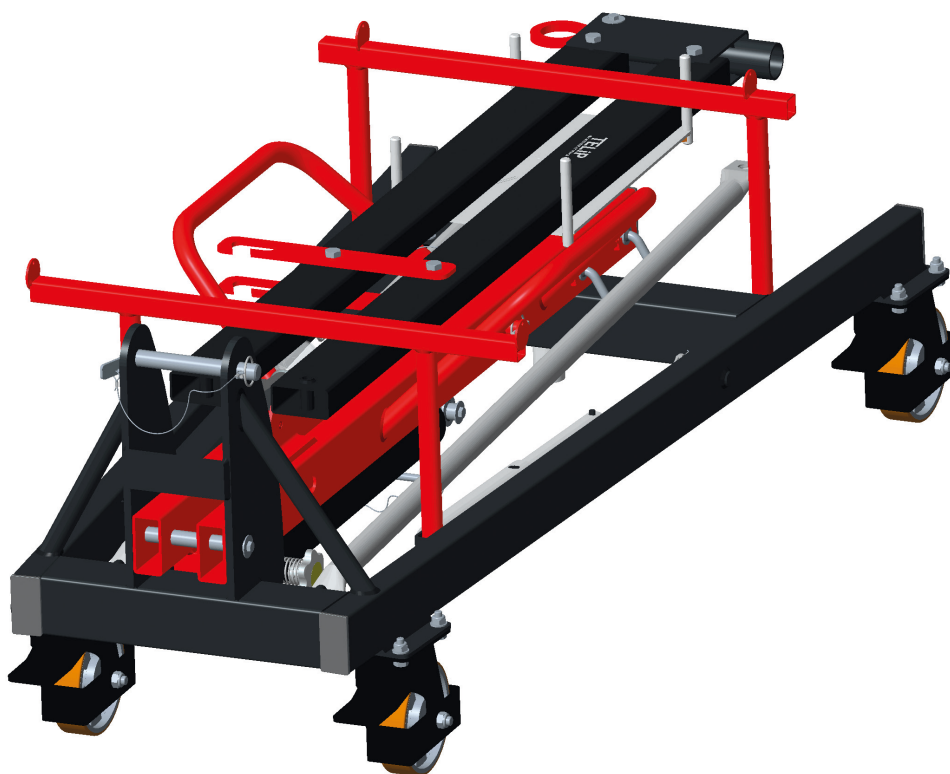

Terms of use

The user is responsible for defining the products to be adapted to its own use. TELIP takes charge of submitting accurate and updated information. However, as part of the continuous improvement of its products, TELIP reserves the right to proceed with frequent modifications without warning. Therefore, TELIP cannot guarantee the accuracy and current reality of information on its products. All transactions are subject to general terms and conditions of sales and transportation. These conditions are available upon request and downloadable on the website www.telip.fr.

TELIP
MANUTENTION ET LEVAGE

TELIP
2, rue Andrée Reigner - Z. I. La Bougeoire
35 130 La Guerche de Bretagne
FRANCE

Tél. : 02 99 96 17 16
Fax : 02 99 96 17 26

contact@telip.fr
www.telip.fr